

SPRING BALANCER

TIGON Spring Balancer Improves Work Safety & Efficiency.
Capacities ranging from 0.5~70kg.


TIGON



**NITTO
MIJIN**

| MODEL | Capacity (kg) | Stroke (m) | Weight (kg) |
|-------|---------------|------------|-------------|
| TW-00 | 0.5~1.5 | 0.5 | 0.2 |
| TW-0 | 0.5~1.5 | 1.0 | 0.5 |
| TW-3 | 1.0~3.0 | 1.3 | 1.4 |
| TW-5 | 2.5~5.0 | 1.3 | 1.5 |
| TW-9 | 4.5~9.0 | 1.3 | 3.4 |
| TW-15 | 9.0~15.0 | 1.3 | 3.8 |
| TW-22 | 15.0~22.0 | 1.5 | 7.2 |
| TW-30 | 22.0~30.0 | 1.5 | 7.6 |
| TW-40 | 30.0~40.0 | 1.5 | 9.8 |
| TW-50 | 40.0~50.0 | 1.5 | 10.4 |
| TW-60 | 50.0~60.0 | 1.5 | 11.6 |
| TW-70 | 60.0~70.0 | 1.5 | 11.8 |

HOSE REEL BALANCER SERIES

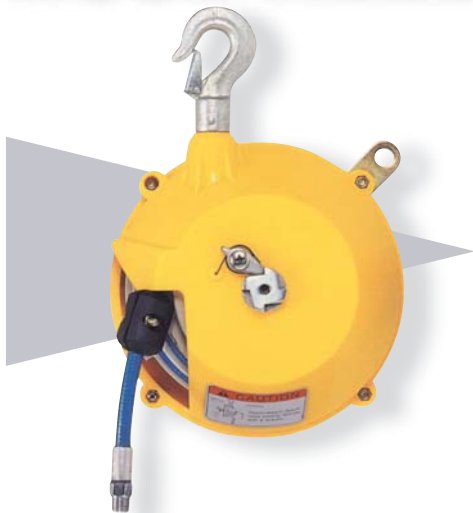

| MODEL | Capacity (kg) | Stroke (m) | Weight (kg) | Hose DIA (Ø mm) |
|-------|---------------|------------|-------------|-----------------|
| HW-0 | 0.5~1.5 | 1.3 | 1.6 | Ø6.5 / Ø10 |
| HW-3 | 1.5~3.0 | 1.3 | 1.7 | Ø6.5 / Ø10 |
| HW-5 | 3.0~5.0 | 1.3 | 1.8 | Ø6.5 / Ø10 |

-Functions both as balancer and hose reel

RETRACTOR SERIES



| MODEL | Capacity (kg) | Stroke (m) | Weight (kg) |
|-------|---------------|------------|-------------|
| RW-0 | 0.5~1.5 | 2.0 | 0.5 |
| RW-3 | 1.0~3.0 | 2.0 | 0.7 |
| RW-5 | 2.5~5.0 | 2.0 | 0.9 |

-Tension easily adjustable using knob



| MODEL | Capacity (kg) | Stroke (m) | Weight (kg) |
|-------|---------------|------------|-------------|
| TW-1R | 0.5~1.5 | 1.5 | 0.3 |

-Tension easily adjustable using knob

★ Specifications and designs are subject to change at any time without notice.



NITTO
NITTO KOHKI CO.,LTD.

Head Office

9-4, Nakaikogami 2-chome,
Ohta-ku, Tokyo 146-8555 Japan
Phone : +81-3-3755-1111 Fax : +81-3-3753-8791

- ▶ E-mail : overseas@nitto-kohki.co.jp
- ▶ URL : www.nitto-kohki.co.jp



Manufactured by

NITTO KOHKI-MIJIN CO.,LTD.

DISTRIBUTED BY



● For environmental conservation, this print is made of the pulp blended with waste paper and printed with soy-based inks.

Printed in Japan 07EV05-①